

C-Series Syringe Pumps with Multiport Valves



PRODUCT OVERVIEW

- > OEM liquid handling component, delivers fluids from microliters to milliliters with exceptional accuracy and precision
- > Utilizes industry standard communication protocols and mounting configurations
- > C24000MP is the preferred choice for low flow rate and low pulsation applications
- > Designed for continuous duty and reliable performance

FEATURES

- > Accommodates 6-way distribution valves
- > High Resolution modes available, up to 192,000 microsteps/full-stroke
- > Uses industry standard OEM or DT Cavo[®] protocol
- > Communication interfaces: RS232, RS485 or CAN
- > Address up to 15 pumps individually
- > Fast valve switch time: < 250 ms between neighboring ports
- > Long-life rotary shear valves (up to 24 times the life of competing valves)
- > Proprietary high-efficiency and maintenance-free stepper motor drive system (no belts to stretch or break)

BASE MODELS

- C3000MP
- C24000MP



(Shown with accessory Syringe)

CONFIGURED OPTIONS

Fluid Contact Syringe Material	Borosilicate Glass and UHMWPE or PTFE (seal) - Pressures to 80 PSI
Fluid Contact Valve Material	PCTFE or PEEK (housing) and UHMWPE (plug) - Pressures to 100 PSI
Syringe Sizes	50 μ L, 100 μ L, 250 μ L, 500 μ L, 1 mL, 2.5 mL, 5 mL, 12.5 mL


PRODUCT SPECIFICATIONS

	C3000MP Syringe Pump	C24000MP Syringe Pump
Stroke Speed	1.2 seconds to 100 minutes per stroke (800 minutes in microstep mode)	4.2 seconds to 800 minutes per stroke (3200 minutes in microstep mode)
Step Resolution	Standard mode 3,000 steps, Hi-Res mode 24,000 steps	Standard mode 24,000 steps, Hi-Res mode 192,000 steps
Drive Design	Direct drive stepper motor/leadscrew with 30 mm of travel. Manually moveable for "power off" syringe removal	Direct drive stepper motor/leadscrew with 30 mm of travel
Valve Options	6-way Distribution valve PCTFE/UHMWPE or PEEK/UHMWPE	
Interface Type	RS232, RS485 or CAN (using industry specific communication protocols)	
Communication Rates	RS232/RS485 9600 or 38400 baud CAN - 100K, 125K, 250K, 500K, 1M bps	
Format (RS232/RS485)	Data Bits - 8, Parity - None, Stop Bit - 1 Half Duplex, Data Terminal and OEM protocols	
Operating Temperature and Humidity	15°C to 40°C (59°F to 104°F) and 20% to 95% RH at 40°C (104°F) non-condensing	
Non-Operating Temperature and Humidity	-20°C to 65°C (-4°F to 149°F) and 30% to 85% RH, non-condensing	
Media Temperature	15°C to 40°C (59°F to 104°F)	


FUNCTIONAL PARAMETERS

Imprecision (full stroke) at 50 µL to 100 µL	< 0.1% CV
Imprecision (full stroke) at 250 µL to 12.5 mL	< 0.05% CV
Inaccuracy (full stroke)	< 1% syringe volume
Power Requirement	24 VDC ± 10%
Power Rating	≤ 1.5 Amp (peak)




FLOW PATH FOR 6-WAY DISTRIBUTION VALVE



C-SERIES PUMP WITH MULTIPORT VALVE INTERFACE DETAILS

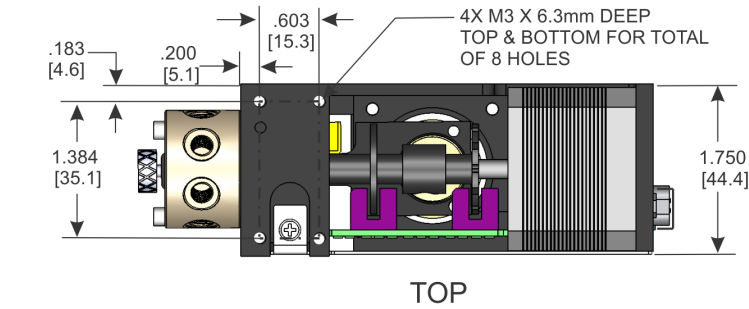

ALL MOUNTING HOLES ARE M3 X 0.5 mm X 6.3 mm DEEP MIN.

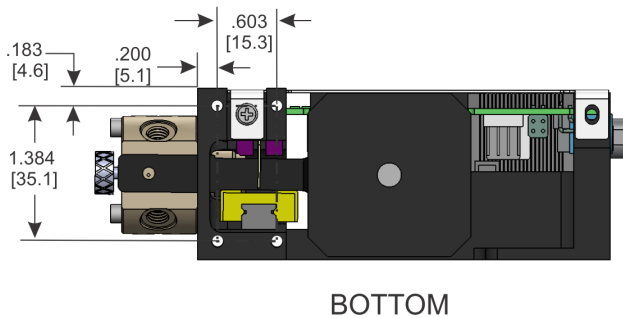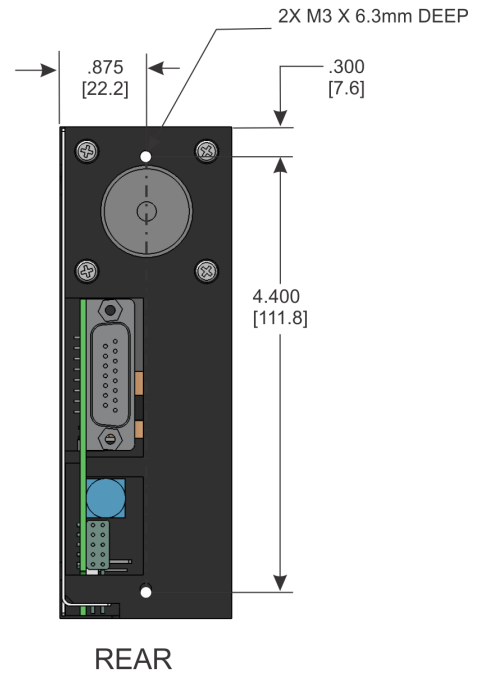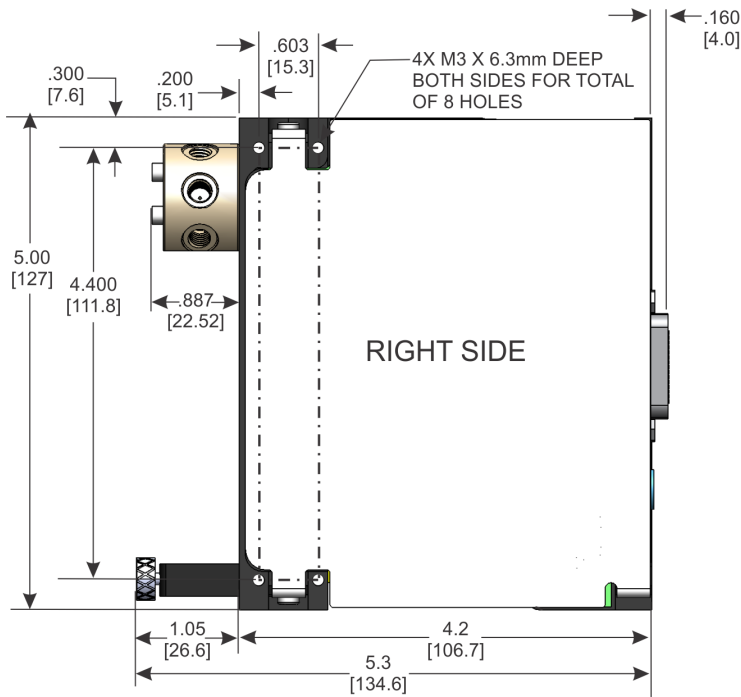

ALL DIMENSIONS UNLESS OTHERWISE SPECIFIED
 .XXX±.008 [0.2 mm]
 (MILLIMETERS SHOWN IN BRACKETS)

PUMP AND VALVE SOLUTIONS FOR OEMS WORLDWIDE



tricontinent.com



Americas
 Tricontinent Scientific, Inc.

12740 Earhart Ave
 Auburn, CA 95602
 USA
 Tel: +1 800 937 4738 or +1 530 273 8888
 liquidhandling.tcs@irco.com

Asia Pacific
 Gardner Denver Thomas Pneumatic Systems (Wuxi), Co., Ltd.
 No. 1 New Dong An Road,
 Shuofang Town
 Wuxi, Xinwu District
 Jiangsu 214142 China
 Tel: +86 510 6878 2258
 tricontinent.cn@irco.com

EMEA
 (HEADQUARTERS
 Gardner Denver Thomas GmbH)
 Livry-Gargan-Str. 10
 82256 Fürstentfeldbruck
 Germany
 Tel: +49 8141 2280 0
 thomas.de@irco.com

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of Tricontinent products. It is the responsibility of the user to determine the suitability of the product for the intended use and the user assumes all risk and liability in connection there with. Tricontinent does not warrant, guarantee or assume any obligation or liability in connection with this information.

Photos of products pictured in this catalog do not necessarily represent a specific model number. To obtain further information for custom options, contact your local Tricontinent office.

Printed in USA Form No. MKT90039 F © Tricontinent Scientific, Inc. All rights reserved.